





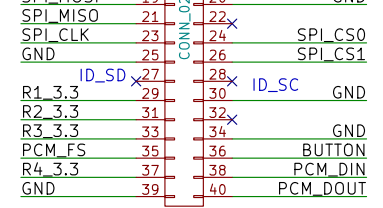


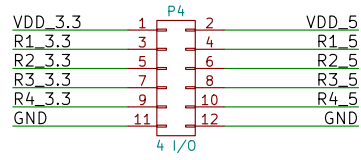




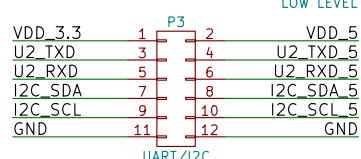


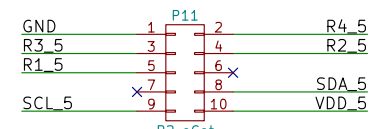


Boot modes and safe boot (LoPy):  
P12+3V3  
1-3 sec: Safe boot, latest firmware is detected  
4-6 sec: Safe boot, previous user update selected  
7-9 sec: Safe boot, factory firmware is selected

Low Level Bootloader (LoPy):  
P2+GND



**electronics.cat** by **JordiBinefa**

Sheet: /  
File: iot\_01.sch

**Title: Placa IoT**

Size: A4 Date: Rev: v0.1  
KiCad E.D.A. kicad 4.0.5+dfsg1-4bpo8+1 Id: 1/1